


Some of the finest electronic equipment produced in recent years and operating under the most arduous conditions embody Gardner Transformers and Chokes exclusively, a setting of which they have proved well worthy. Not so remarkable when their quality, design and performance are considered in their true perspective. Naturally then, the whole of our production is earmarked for work of the highest priority.

GARIINFRS RADIO LIMITED

CHRISTCHURCH · HANTS SOMERFORD

WHY YOU PREFER ACOUSTICAL-One of a series

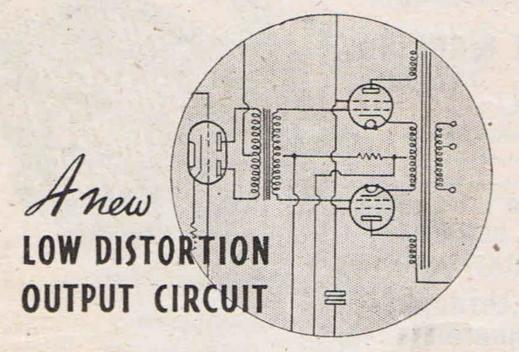

The new low distortion output circuit (an Acoustical Provisional Patent) incorporated in the M31 Amplifier provides a very high standard of reproduction-The output valves operate partly as triodes with cathode follower output and partly as tetrodes with negative feedback, thus giving considerable cancellation of generated harmonics and a high damping factor. Just one reason why you prefer Acoustical.

"Addressing the Public"-a booklet of useful information and diagrams for all those engaged on Public Address work. 1/- post free.



M.R. SUPPLIES

have the following superior and brand new RADIO and ELECTRICAL EQUIPMENT in stock and available for immediate despatch or collection. All prices net cash. VOLTAGE CHANGING TRANSFORMERS, 200/250 v. to 100/110 v. (and vice-versa). Fully shielded, with countersunk terminal blocks and properly rated. 75 va., 29/6. 120 va., 37/6. Also small supply of 550 va. (suitable for cine, electro-medical, etc.). Double-wound, 230 v. to 100 and 110 v. (and vice-versa), in cast brackets with terminal panels, £6 10s. (owing to heavy weight and packing difficulties we cannot despatch the 550 va. model—we have 72 only).

STEP-DOWN TRANSFORMERS, 200/250 v. Prim. Secs.:—5, 12 and 17 v. at 6 amps., 49/6 (desp. 2/-). Secs.:—7, 11 and 15 v. at 2 amps., 20/-. Sec.:—22 v. at 2 amps, 18/6.

BATTERY CHARGERS, for 200/250 v. A.C. Metal rectified. In strong black crystalline steel cabinet, 9in. × 5in. × 4in. for wall suspension. Screw-in mains selection and radial switch for voltage selection, 2, 6 and 12 v., at full 1 amp., £3 17s. 6d. S.T.C. METAL RECTIFIERS, D.C. delivery up to 12 v. at 1½ amps., 12/6. SLIDING RESISTANCES, 100 watts. Fully enclosed, constantly rated. 10 ohms 3 amps., 50 ohms 1.4 amps., 200 ohms 0.7 amp. Any one, 25/-. Also 172 ohms (graded). Max. 2 amps.; min. 0.07 amp., 32/6. STAGE DIMMERS, controlling stated load from full bright to black-out at 220/240 v., fitted worm drive and handwheel, 1,000 watts, £6 17s. 6d. 1,500 watts, £8 8s. (Carr. either 7/6, plus 20/- for returnable case). MILLIAMMETERS by first-class makers. High-grade precision m/coil instruments, flush mtg. 0/1 m.a., 2½in., 52/6; 3½in., 67/6. Also same make, 0/500 microamps (for 2,000 ohms/voit combined instrument), 3½in., 75/-. VITAVOX HIGH FIDELITY SPEAKERS, 12-in. P.M. (Ticonal), 15 ohms coil, handling 10 watts. Very latest development and best specification. £7 (desp. 5/-). We are obtaining Very latest development and best specification. £7 (desp. 5/-). maximum delivery of these but have to advise early application.

GOODMAN MINIATURE P.M. M/COIL UNITS, for speaker or microphone. 31 inoverall, fitted high-flux P.M. latest model, 30/-.

GRAMPIAN M/COIL MICROPHONES, suspended in square frame with plated mounting boss, 15 ohms, £4 4s. Also same make, Senior model for highest quality work, all plated with local on-off sw., 15 ohms, £7 5s. ROTHERMEL PIEZO-CRYSTAL MICROPHONES, D.104, all-plated with suspension rings and 6ft. sc. cable, £5 5s. Also sound cell type BR.2S, £10 10s. Also miniature deaf-aid insert type, 1½in. dia., 29/6. FLOOR STANDS, collaps. ext. to 5½ft., all chrom., 45/6. Cradles for D.104 only, 8/-.

G.E.C. PROJECTOR SPEAKERS for efficient P.A., supplied with 10-watt P.M. weatherproof unit, 15 ohms (with 600 ohm line trans.). With 42in. all-metal exp. horn, £10 5s. (carr. 7/6) or with 30in. Triple Horn (dial for car use), £10 15s. (exp. 100 for car use). this address). Single 30in. metal HORNS, fitted standard thread, 47/6 (carr. 3/-). G.E.C. INDUSTRIAL SPEAKERS, in 12in. drum., handling 8 watts, fitted multi-trans., 65/- (carr. 3/-). ERICSSON HEADPHONES, with adjustable headgear, 2,000 ohms, 25/- pair. PYROBIT ELECTRIC SOLDERING IRONS, only model that can be held like a pencil, 9in. long, best for elect, work. 220/250 v., 22/-. RESTS for same, with cleaning file, 4/-. SPARE ELEMENTS, 3/6. SPARE ANGLE BITS, 4/6. CENTRALAB VOL. CONTROLS, less switch. 1,000, 3,000, 10,000, 50,000, 100,000 ohms and ½ megohm, any one, 3/11 (45/- doz.). PYROBIT NEON TESTERS, with screwdriver, 100/750 v., 9/6. ROTHERMEL CRYSTALIPICKUPS, senior bakelite model. 78/9. STROBOSCORIC SPEED TESTERS, (50 c.) showing 78, 79 and 80 r.p.m. model, 78/9. STROBOSCOBIC SPEED TESTERS, (50 c.) showing 78, 79 and 80 r.p.m. (cardboard only), 1/-.

Please include sufficient for despatch, where not stated.

M.R. SUPPLIES, 68, New Oxford Street, London, W.C.1

(Telephone: MUSeum 2958)